


Heights Woodworking Machinery

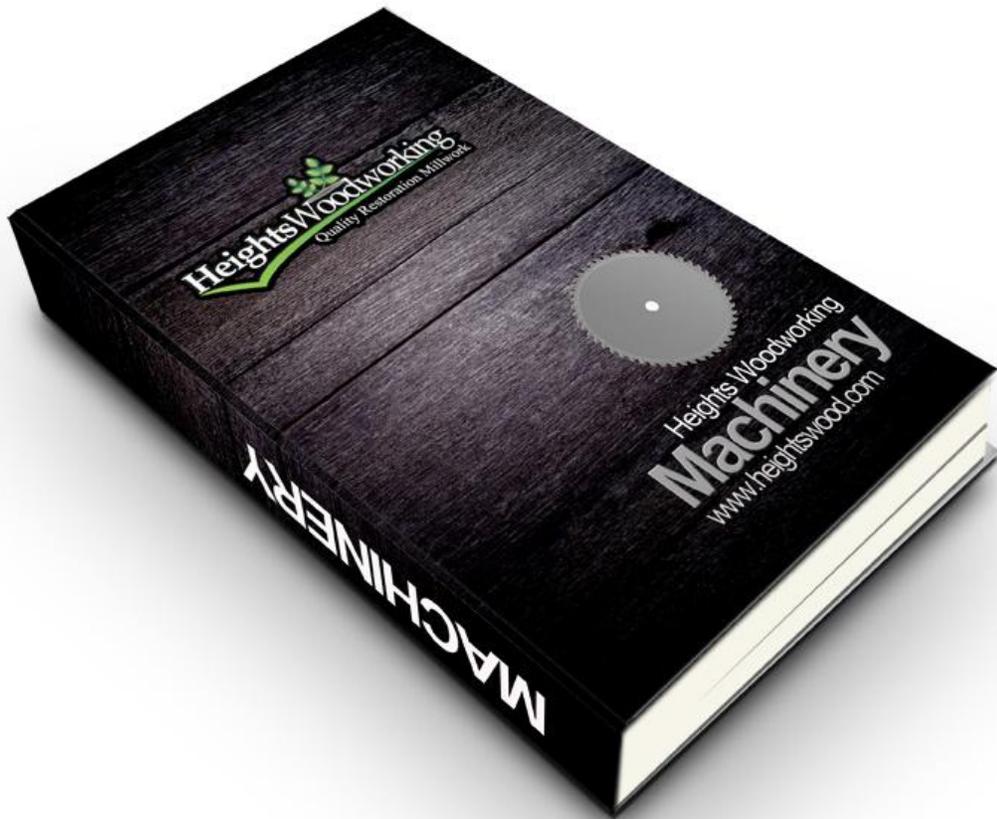

Heights Woodworking Machinery

Machinery	Description
 <p>Weining Moulder</p>	<p>Used to turn rough lumber into profiled products in one pass; i.e. Douglas-fir flooring, S4S, custom profiles.</p>
 <p>Martin 24" Planer</p>	<ul style="list-style-type: none"> ✓ Capacity 24" x approx. x 9" height ✓ Sectional feed rollers + chip breaker <li style="padding-left: 20px;">Variable speed feed 0-69FPM ✓ 4-knife HSS cutter head ✓ Auto up & down on table ✓ Approx 7 ½ to 10hp, 220/440V, 3 ph ✓ Knife grinding attachment ✓ Shaving hood ✓ Electric console
 <p>Powermatic 22" Planer</p>	<ul style="list-style-type: none"> ✓ Helical cutterhead with knife inserts provides ✓ smoother, quieter cutting and finer finish than conventional systems ✓ Cast iron 1300 lb. construction for solid performance without vibration ✓ 2 feed speeds - 20/30 fpm - accommodates rough and fine finish work ✓ Segmented infeed roller with sectional chipbreaker allows multiple board planing ✓ Roller bearing-mounted feed rollers for long life Adjustable bed rollers allow smooth feeding of rough or finished workpieces Oversized cast iron table travels on 2 large lead screws for heavy duty support
 <p>Martin 12' Sliding Panel Saw</p>	<ul style="list-style-type: none"> ✓ 7.5 HP Main motor with safety brake ✓ 2 Axis scoring unit ✓ 53" Rip fence width ✓ Automatic movement of blade height, tilting, and rip fence movement ✓ Digital cross cut fence stops
 <p>Panhans 10' 6" Sliding Panel Saw</p>	<ul style="list-style-type: none"> ✓ Max. sawblade dia. 500mm. ✓ Max. cutting height 172.5mm. ✓ Blade speed 1000 - 6000 rpm stepless variable control.

	<ul style="list-style-type: none"> ✓ Cutting length 3200mm. ✓ Cutting width 1250mm. ✓ Motor power 7.5kw. ✓ Touch screen positioning control, 5.7", for electrical height and tilting adjustment, with integrated position display for rip fence. ✓ Super Gehrfix 1 fence ✓ Auxilliary mitre fence. ✓ Scoring system EPS with electronical vertical / horizontal setting. (Main blade dia reduced / cutting height reduced when in use).
 <p>Schelling 12' Sliding Panel Saw</p>	<ul style="list-style-type: none"> ✓ 20 HP Main Saw Motor ✓ 3.5 HP Scoring Saw Motor ✓ Automatic Saw Height Adjustment ✓ Automatic Side Squaring Device ✓ (7) Pneumatic Grippers ✓ (3) Air Flootation Tables ✓ IPC Computer w/ Color Screen ✓ Keyboard w/ Mouse
 <p>Delta 12" Table Saw</p>	<ul style="list-style-type: none"> ✓ Fixed splitter maintains correct alignment with saw blade at all times ✓ Tilts with saw arbor for angle cutting ✓ Easily removed for non-through cutting applications ✓ Clear, see-thru LEXAN, split-basket shields ✓ Universal Switch Mounting Bracket
 <p>Powermatic 12' Table Saw</p>	<ul style="list-style-type: none"> ✓ Equipped with Accu-fence, Table Extension, Biesemeyer ✓ T-square Table Saw Blade Guard System & Table Saw Mobile Base.
 <p>Wadkin 10" Table Saw</p>	<ul style="list-style-type: none"> ✓ Biesemeyer Fence and Rails electroplated with white ✓ Cabinet painted with hammered green paint ✓ Extension table ✓ Outfeed table ✓ Rust removed from table ✓ Dust collection optimized ✓ Fix the crack in the extension wing

 <p>Martin 20" Joiner</p>	<ul style="list-style-type: none"> ✓ Cutting width 510 mm 20" ✓ Maximum cutting depth 8 mm. (0.31 inches) ✓ Cutter head is a custom built Byrd cutter head. Infeed table 2 meters (78.75 inches) Outfeed table 1.2 meters (47.2 inches) Tilting Fence 1.2 meters (47.2 inches), On ball bearings slides easily ✓ Dust extraction port 160 mm (6-inch plastic hose will fit) ✓ Dust collection requires about 1250 cubic feet per minute 3 HP Oneida gorlila dust collector is more than adequate ✓ Motor 5.5 KW or 7.5 HP 3 phase only I use a converter ✓ Electrical controls include height of infeed table and bed adjustment for convex or concave cutting ✓ Electric brake swing away guard over the knife head built in electricals for motorized feeder ✓ Very low dust emissions meets American standards.
 <p>Butfering 42" Wide Belt Sander</p>	<p>SWT widebelt sanders for solid wood components, wood based panels of MDF, particleboard and plywood.</p>
 <p>SCM Over Head Router</p>	<ul style="list-style-type: none"> ✓ Overhead Router. ✓ 9 H.P., with built in vacuum pump for holding pieces onto a template. ✓ .75 H.P. - 15 Cubic meters/Hr. ✓ Automatic feeder. ✓ 0.5 Kw motor. Foot valve. ✓ Spindle speeds of 10,000 and 20,000 RPM. ✓ Weight 837 KG .
 <p>Bloont 13' Lath Wood Turning</p>	

	<p>Bauerle BS-800 24" Band Saw</p>	<p>Band Saw BS 800 Type Bauerle roll diameter 800mm Throat / cutting width 770 mm height 520mm diffuser strip length 5600mm Motor power 4 hp table tiltable up to 45 with stop above and below with 3 - Roller guide Dimensions (HxWxD) 243x150x90cm ideal machine for carpenters and timber, which a somewhat larger machine search</p>
	<p>IDM 14' Edge Bander</p>	<p>Working width max mm: 2.200 Working width min mm: 240 Milling units before edgebanding: 1 Edgeband thickness max mm: 20 Edgeband height max mm: 60 Feedrate max m/min: 25 Stepless adjustable feed: Yes Buffing unit: Yes Belt sanding station: Yes Magazine for single strips: Yes Corner rounding: 4 Fraeser Scraper: Yes Glue system: Vorschmelzbehaelter Cross cut saw: 2 motors Safety enclosure: Yes CE-mark: Yes Extraction socket diameter mm: 50;80;120 Required space lxwxh: 11350</p>
	<p>Panhans 1 ¼ - 15 HP Shaper</p>	
	<p>Okoma 1 ¼ 15 HP Tilting Shaper</p>	<p>Swivel milling spindle OKOMA SFM 3 Table 1100 x 870 mm milling shaft 4500/6000/9000/12000 rev / min Increased engine 6 / 7, 5 kW rotating spindle fence with fine adjustment of the milling shaft swivel range 0-45 degrees left-right rotation of the tiller shaft</p>

 <p>Williams & Hussey Overhead Shaper Model 206 Molder</p>	<ul style="list-style-type: none"> ✓ 2 HP Motor (Mfg warranty of motor) ✓ 7000 RPM Arbor ✓ Adjustable Feed Rate 1-19 ✓ FPM ✓ Height Above Final Cut: 3/16" ✓ Max Profile Depths: 3/4" ✓ Max profile width: 6 3/4" ✓ Planes 7" wide
<p>Scales 15 HP Compressor</p>	
<p>Scales 10 HP Compressor</p>	
 <p>Arco 5HP Compressor</p>	
 <p>Ritter 2 Bit Boring Mach</p>	<p>Model: R220P 115V 11 phase Table 30x24 Foot pedal operation Pneumatic clamp s/n 3959</p>
 <p>IDM Boring Machine</p>	

	<p>Ruba Chain Mortiser</p>	
	<p>Dewalt 10HP Radial Arm Saw</p>	<p> BLADE: 10" MOTOR: 2 HP / 3 PHASE / 220/440 V BRAKE: MANUAL MOTOR SPEED: 3,425 RPM STANDARD GUARD: 10" </p>
	<p>Delta Floor Model Drill Press</p>	<p> This powerful drill press features sixteen speeds for drilling a variety woods, plastics, and metals, and the rack-and-pinion table is silky smooth when raising and lowering it to the desired height. The adjustable-position locking system allows for easy angle adjustments for repetitive drilling. The bright laser make certain that drilling accuracy is perfect every time </p>
	<p>10' 6" Door Clamp Machine</p>	<p> Fast pneumatic clamping and squaring One lever operation 6 reliable heavy duty pneumatic diaphragm cylinders 2 cross clamps for rails 4 draw clamps for stiles 45 degree angle for easy access </p>
	<p>Oliver Singer End Tenorer</p>	
<p>Central Vacuum System</p>		